


INTERNATIONAL JOURNAL OF
ENGINEERING (IJE)

ISSN : 1985-2312

Volume 8 • Issue 3 • June 2014
Publication Frequency: 6 Issues / Year

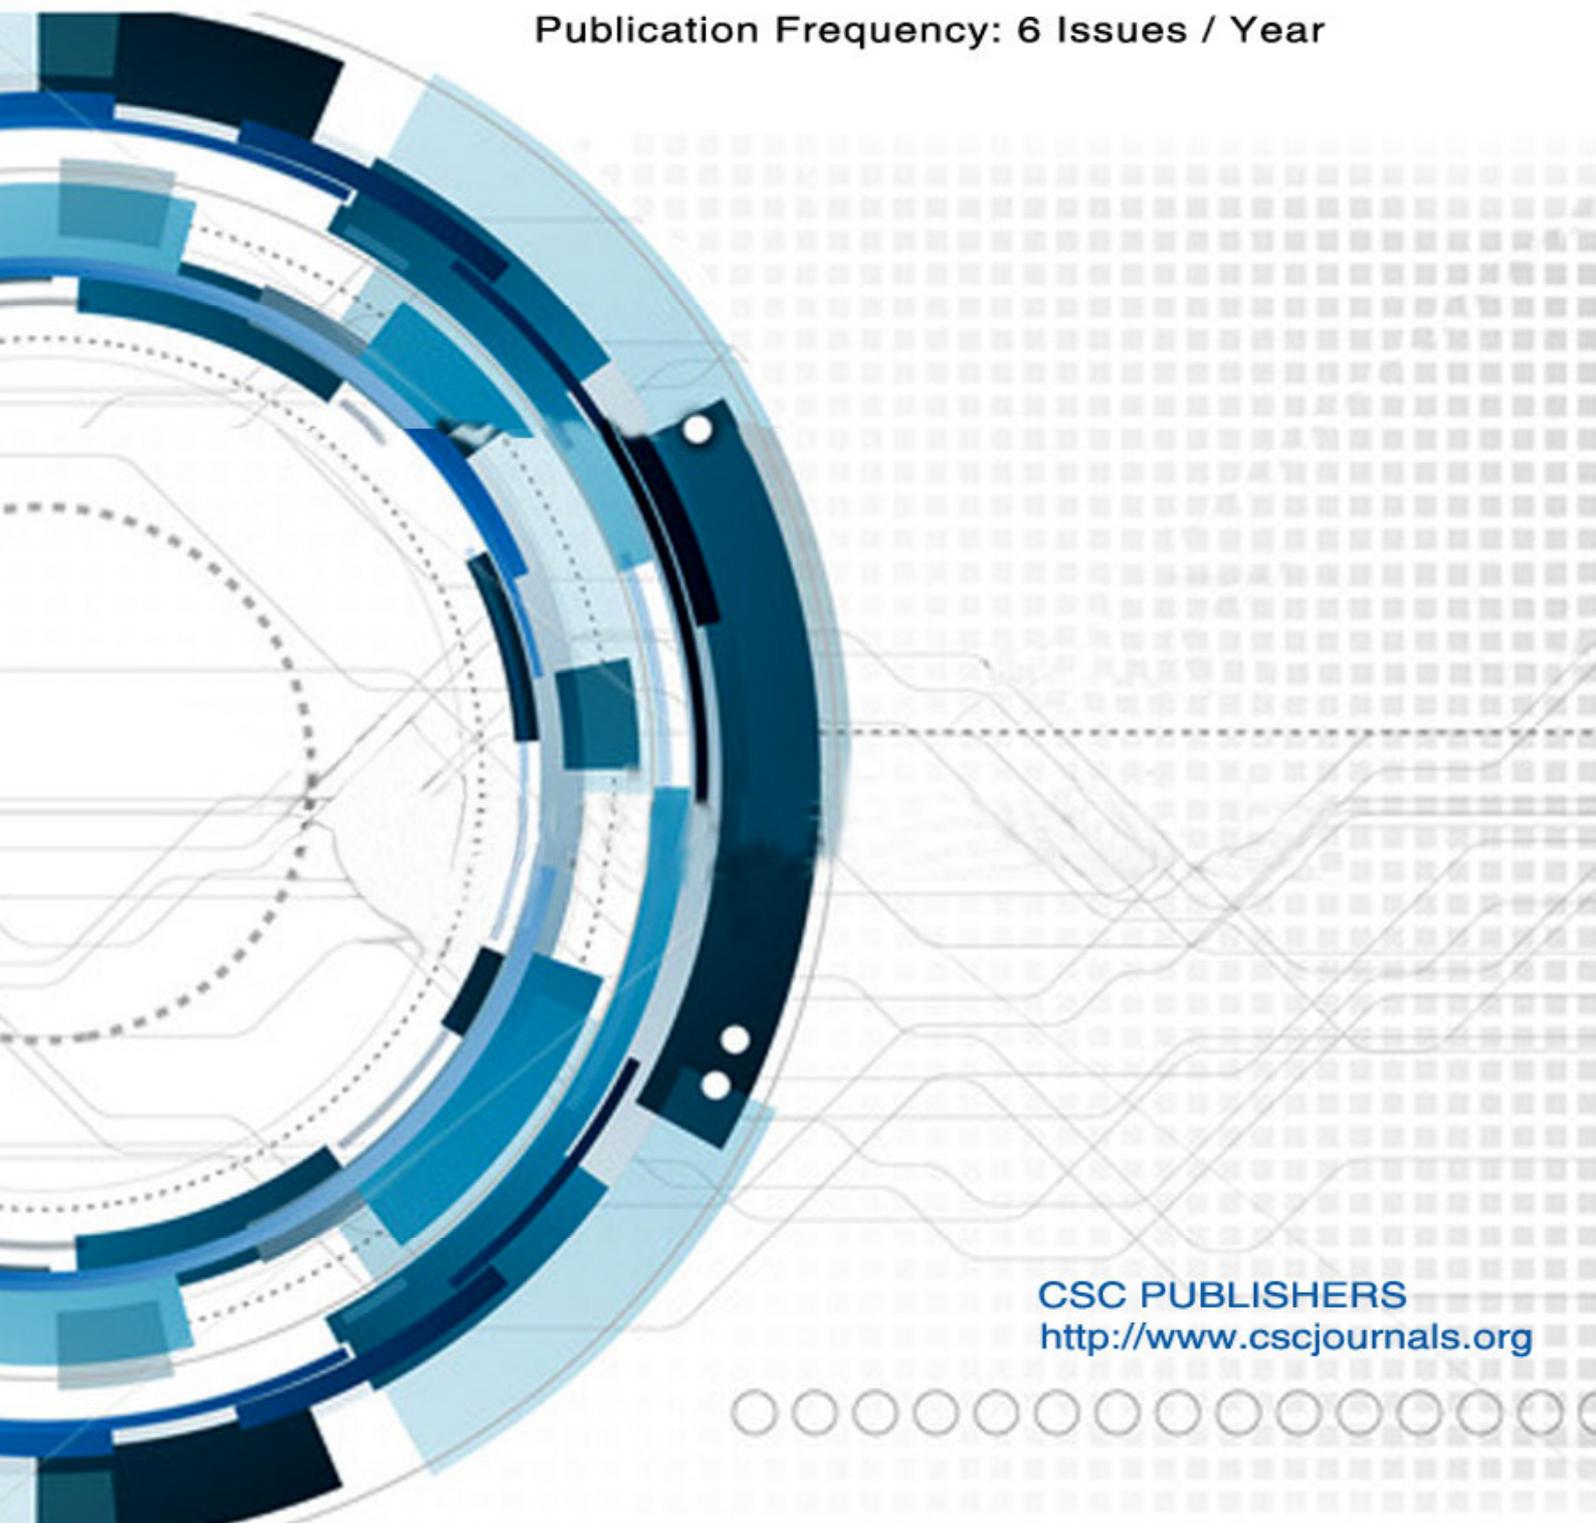

CSC PUBLISHERS
<http://www.cscjournals.org>

INTERNATIONAL JOURNAL OF ENGINEERING (IJE)

VOLUME 8, ISSUE 3, 2014

**EDITED BY
DR. NABEEL TAHIR**

ISSN (Online): 1985-2312

International Journal of Engineering is published both in traditional paper form and in Internet.

This journal is published at the website <http://www.cscjournals.org>, maintained by Computer Science Journals (CSC Journals), Malaysia.

IJE Journal is a part of CSC Publishers

Computer Science Journals

<http://www.cscjournals.org>

INTERNATIONAL JOURNAL OF ENGINEERING (IJE)

Book: Volume 8, Issue 3, June 2014

Publishing Date: 01-06-2014

ISSN (Online): 1985-2312

This work is subjected to copyright. All rights are reserved whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, re-use of illustrations, recitation, broadcasting, reproduction on microfilms or in any other way, and storage in data banks. Duplication of this publication of parts thereof is permitted only under the provision of the copyright law 1965, in its current version, and permission of use must always be obtained from CSC Publishers.

IJE Journal is a part of CSC Publishers

<http://www.cscjournals.org>

© IJE Journal

Published in Malaysia

Typesetting: Camera-ready by author, data conversion by CSC Publishing Services – CSC Journals, Malaysia

CSC Publishers, 2014

EDITORIAL PREFACE

This is the *Third* Issue of Volume *Eight* for International Journal of Engineering (IJE). The Journal is published bi-monthly, with papers being peer reviewed to high international standards. The International Journal of Engineering is not limited to a specific aspect of engineering but it is devoted to the publication of high quality papers on all division of engineering in general. IJE intends to disseminate knowledge in the various disciplines of the engineering field from theoretical, practical and analytical research to physical implications and theoretical or quantitative discussion intended for academic and industrial progress. In order to position IJE as one of the good journal on engineering sciences, a group of highly valuable scholars are serving on the editorial board. The International Editorial Board ensures that significant developments in engineering from around the world are reflected in the Journal. Some important topics covers by journal are nuclear engineering, mechanical engineering, computer engineering, electrical engineering, civil & structural engineering etc.

The initial efforts helped to shape the editorial policy and to sharpen the focus of the journal. Started with Volume 8, 2014, IJE appears with more focused issues. Besides normal publications, IJE intend to organized special issues on more focused topics. Each special issue will have a designated editor (editors) – either member of the editorial board or another recognized specialist in the respective field.

The coverage of the journal includes all new theoretical and experimental findings in the fields of engineering which enhance the knowledge of scientist, industrials, researchers and all those persons who are coupled with engineering field. IJE objective is to publish articles that are not only technically proficient but also contains information and ideas of fresh interest for International readership. IJE aims to handle submissions courteously and promptly. IJE objectives are to promote and extend the use of all methods in the principal disciplines of Engineering.

IJE editors understand that how much it is important for authors and researchers to have their work published with a minimum delay after submission of their papers. They also strongly believe that the direct communication between the editors and authors are important for the welfare, quality and wellbeing of the Journal and its readers. Therefore, all activities from paper submission to paper publication are controlled through electronic systems that include electronic submission, editorial panel and review system that ensures rapid decision with least delays in the publication processes.

To build its international reputation, we are disseminating the publication information through Google Books, Google Scholar, Directory of Open Access Journals (DOAJ), Open J Gate, ScientificCommons, Docstoc and many more. Our International Editors are working on establishing ISI listing and a good impact factor for IJE. We would like to remind you that the success of our journal depends directly on the number of quality articles submitted for review. Accordingly, we would like to request your participation by submitting quality manuscripts for review and encouraging your colleagues to submit quality manuscripts for review. One of the great benefits we can provide to our prospective authors is the mentoring nature of our review process. IJE provides authors with high quality, helpful reviews that are shaped to assist authors in improving their manuscripts.

Editorial Board Members

International Journal of Engineering (IJE)

EDITORIAL BOARD

ASSOCIATE EDITORS (AEiCs)

Professor. Ernest Baafi
University of Wollongong
Australia

Dr. Tarek M. Sobh
University of Bridgeport
United States of America

Dr. Cheng-Xian (Charlie) Lin
University of Tennessee
United States of America

Assistant Professor Aleksandar Vujovic
Univeristy of Montenegro

Assistant Professor Jelena Jovanovic
University of Montenegro
Serbia and Montenegro

EDITORIAL BOARD MEMBERS (EBMs)

Professor. Jing Zhang
University of Alaska Fairbanks
United States of America

Dr. Tao Chen
Nanyang Technological University
Singapore

Dr. Oscar Hui
University of Hong Kong
Hong Kong

Professor. Sasikumaran Sreedharan
King Khalid University
Saudi Arabia

Assistant Professor. Javad Nematian
University of Tabriz Iran

Dr. Bonny Banerjee
Senior Scientist at Audigence
United States of America

Associate Professor. Khalifa Saif Al-Jabri
Sultan Qaboos University
Oman

Dr. Alireza Bahadori
Curtin University
Australia

Dr Guoxiang Liu
University of North Dakota
United States of America

Dr Rosli
Universiti Tun Hussein Onn
Malaysia

Professor Dr. Pukhraj Vaya
Amrita Vishwa Vidyapeetham
India

Associate Professor Aidy Ali
Universiti Putra Malaysia
Malaysia

Professor Dr Mazlina Esa
Universiti Teknologi Malaysia
Malaysia

Dr Xing-Gang Yan
University of Kent
United Kingdom

Associate Professor Mohd Amri Lajis
Universiti Tun Hussein Onn Malaysia
Malaysia

Associate Professor Tarek Abdel-Salam
East Carolina University
United States of America

Associate Professor Miladin Stefanovic
University of Kragujevac
Serbia and Montenegro

Associate Professor Hong-Hu Zhu
Nanjing University
China

Dr Mohamed Rahayem
Örebro University
Sweden

Dr Wanquan Liu
Curtin University
Australia

Professor Zdravko Krivokapic
University of Montenegro
Serbia and Montenegro

Professor Qingling Zhang
Northeastern University
China

TABLE OF CONTENTS

Volume 8, Issue 3, June 2014

Pages

- 30 – 37 Path Loss Prediction Model For UHF Radiowaves Propagation In Akure Metropolis
Akingbade Kayode Francis, Olorunnibi Ezekiel 'Dunsin

Path Loss Prediction Model For UHF Radiowaves Propagation In Akure Metropolis

Akingbade Kayode Francis

*Electrical and Electronics Engineering Department
Federal University of Technology,
Akure, Ondo State, Nigeria.*

kfakingbade@futa.edu.ng

Olorunnibi Ezekiel 'Dunsin

*Electrical and Electronics Engineering Department
Federal University of Technology,
Akure, Ondo State, Nigeria.*

eze2soar@gmail.com

Abstract

Propagation path loss models play an important role in the design of cellular systems to specify key system parameters such as transmission power, frequency, antenna heights, and so on. Several models have been proposed for cellular systems operating in different environments (indoor, outdoor, urban, suburban, and rural). This work sets out to predict the path loss of a UHF channel along three routes in Akure metropolis using existing models (Friis, Okumura-Hata). Broadcast signal field strength measurements were taken across the three routes. Measured values were compared with the different models prediction to determine model suitable for the city. Consequently, a modified Hata' model was developed which can be deployed by engineers in radio communications system planning and design.

Keywords: Path Loss, Models, Measurements, Radio Wave, Friis, Okumura-Hata.

1. INTRODUCTION

During radio wave propagation, an interaction between waves and environment attenuates the signal level. It causes path loss and finally limits coverage area. Path loss prediction is a crucial element in the first step of network planning [1]. Theoretical and experimental studies of path loss prediction models can be found in many literatures. However, there is no assurance that the available models can fit in perfectly to all geographical locations. Most of the studies have been performed in developed countries using various experiments, whereas in tropical regions, especially in some Nigerian cities like Akure in Ondo State, studies are still needed to be pursued which may lead to new prediction model. Based on this reason, it is proposed to conduct these experiments so as to come up with a path loss prediction model of UHF waves for Akure Metropolis. The radio channel comprises of the propagation medium, the transmitting and receiving antennas. Radio transmission takes place from a transmitter to a receiver through propagation paths. These are referred to as propagation mechanisms arising out of the different interactions with the interfering objects along the path as said by Fleury and Leuthold (1996) [2]. Each of the models designed are site-specific and therefore in using them for analysis, they must be used for the right sites for which they were designed. The Okumura model is one of the models which are used for prediction of wireless propagation parameters across different terrains namely the urban, sub-urban and rural environments [3].

2. PATH LOSS PREDICTION MODELS

Some of these models were derived in a statistical manner based on field measurements and others were developed analytically based on diffraction effects. Each model uses specific parameters to achieve reasonable prediction accuracy. Rappaport et al [4] reported that urban radio channels provide more predictable path loss due to diffraction waves and wave guiding

effects along city streets. Transmission in hilly terrains arrives at a greater delay after a direct line of sight (LOS) is established. Rappaport et al [4] noted that for mountainous regions amplitudes within 100dB of a direct signal at excess delay of $20\mu\text{s}$ or more can be arrived at according to the author's study carried out. Ramakrishna [6] performed a path loss prediction in the areas where there is building and an assumption of the field to possess a flat terrain. The approach Ramakrishna used for validation was a three dimensional vector parabolic equation concept for calculating path loss in an urban environment and then compared to results produced by the uniform theory of diffraction (UTD). This model may not be an efficient prediction for transmission in an area without buildings especially for repeater stations located in isolated mountainous areas because they do not possess some field characteristics described. Nešković et al [7] used four empirical models: SU1 model, COST 231-Hata model, Macro and Ericsson model, which are most suitable for path loss prediction for such a system to work on radio frequency propagation mechanisms and empirical models for fixed wireless access systems. By using these propagation models the receiving signal levels are predicted for different types of environment for WiMAX (Worldwide Interoperability for Microwave Access) system installed in the city of Osijek, Croatia.

The long distance prediction models intended for macrocell systems use base station and mobile station antenna heights and frequency. On the other hand, the prediction models for short distance path-loss estimation use building heights, street width, street orientation, and so on. These models are used for microcell systems [3]. There are various propagation prediction models for mobile radio communications systems such as ITU models, Long-Rice model, Okumura-Hata's model, Lee's model, Durin's model, Walfisch and Bertoni's model, Friis transmission equation etc. In this work, particular attention is given to prediction model by Okumura-Hata and Friis transmission equation. This is because these models have wide acceptability and as such will be used to evaluate the propagation measurement results that were gotten from the investigation.

A. Friis Transmission Equation

Friis transmission equation is a simplified path loss prediction model used in radio waves propagation. Radio and antenna engineers use the following simplified formula for path loss L , between two isotropic antennas in free space:

$$L = 20 \log_{10} \left(\frac{4\pi d}{\lambda} \right) \quad (1)$$

where d is the distance (line of sight) away from the transmitter in meters, λ is the wavelength of the wave in MHz [4].

B. Okumura-Hata model for Urban Areas

The Hata Model for Urban Areas, also known as the Okumura-Hata model for being a developed version of the Okumura Model, is the most widely used radio frequency propagation model for predicting the behaviour of cellular transmissions in built up areas. This model incorporates the graphical information from Okumura model and develops it further to realize the effects of diffraction, reflection and scattering caused by city structures. This model also has two more varieties for transmission in Suburban Areas and Open Areas. Hata Model predicts the total path loss along a link of terrestrial microwave or other type of cellular communications.

This particular version of the Hata model is applicable to the radio propagation within urban areas. This model is suited for both point-to-point and broadcast transmissions and it is based on extensive empirical measurements taken.

Hata Model for Urban Areas is formulated as:

$$L_U = 69.55 + 26.16 \log f - 13.82 \log h_B - a(h_M) + [44.9 - 6.55 \log h_B] \log d \quad (2)$$

For large city with the wave frequency of transmission, $f \geq 400$ MHz,

$$a(h_M) = 3.2[\log(11.75 h_M)]^2 - 4.97 \quad (3)$$

From equations (2) and (3), L_U is the path loss in Urban Areas in dB, h_B is the height of base station antenna in meters, h_M is the height of mobile station antenna in meters, f is the frequency of transmission in MHz, $a(h_M)$ is the antenna height correction factor and d is the distance between the base and mobile stations in kilometer [8].

By specifications, Okumura-Hata model has the following range:

Carrier frequency: $150 \text{ MHz} \leq f \leq 1500 \text{ MHz}$

Base station height: $30 \text{ m} \leq h_B \leq 200 \text{ m}$

Mobile station height: $1 \text{ m} \leq h_M \leq 10 \text{ m}$

Distance between mobile and base station: $1 \text{ Km} \leq d \leq 20 \text{ Km}$ [5].

3. RESEARCH METHODOLOGY

A. Physical Location Survey

Physical location survey was the preliminary stage conducted to select sites. During the site survey, any obstacle such as trees, hills and structures capable of causing obstruction of radio signal along the line of sight was taken note of. The routes along which locations were selected includes routes A, B and C representing OSRC/ Ilara/ Igbara Oke highway (Akure South), OSRC/ Iju/ Ado highway (Akure North) and OSRC/ Oyemekun/ Alagbaka highway respectively.

B. GPS and Field Strength Meter Measurements

The various air distances between the transmitting antenna at OSRC and the receiving antenna in the respective locations were mapped using the GPS receiver. The position of the transmitting antenna/base station was marked as a 'home' waypoint on the mark position page of the GARMIN GPS Map 76 receiver and stored in the memory [9]. A trip of about 20 Km with the aid of a slowly moving van away from the base station through Route A was taken at an incremental rate of approximately 1 Km line of sight (LOS). Measurements of received signal strength were taken as a function of distance away from the base station at each 1 Km LOS with the aid of the GPS and a receiving antenna attached to a field strength meter. This procedure was also used to determine straight line distance between the receiving antenna in the other routes and the transmitting antenna that was permanently fixed at OSRC, Akure. Elevation of locations, longitude and latitude, audio, video and peak components of the transmitted radio signal were determined, measured and recorded

C. Parameters for the Experiment

Based on the models used and the nature of this experiment, the following parameters were used.

TABLE 1: Experimental Parameter.

Parameter	Route A	Route B	Route C
Frequency	487.25 MHz	487.25MHz	487.25MHz
Power transmitted	16000 W	16000 W	16000 W
Height of base station	323.1 m	323.1 m	323.1 m
Height of mobile station	1.83 m	1.83 m	1.83 m

4. RESULTS AND ANALYSIS

The measured data collected at different locations along the three routes were analyzed using ordinary least square (OLS) regression with Microsoft Excel, with the graphs of the results plotted with the same software package. The respective path loss along each route was calculated using the experimental parameters used for this measurement as presented in Table 1. The mean error was then generated. From the results, a model was developed for the routes under observation.

A .Path Loss Calculations

Friis transmission equation and Okumura-Hata model were used to predict the path losses along the three routes and the results are shown in Tables: 2, 3, and 4. The graph of the path loss prediction against the respective LOS along the three routes established the fact that the path loss of radio signal being propagated increases with distance away from the base station.

TABLE 2: Path loss prediction along route A.

LOS(Km)	1.02	2.13	3.01	4.00	5.00	6.01	7.01	7.14	7.20	8.00	9.11	10.10	10.94
Friis model(dB)	86	93	96	98	100	102	103	103	103	104	105	106	107
Okumura-Hata(dB)	113	122	126	130	132	135	137	137	137	138	140	141	142

TABLE 3: Path loss prediction along route B.

LOS(Km)	1.02	2.00	3.02	4.00	5.00	6.04	7.02	7.57	8.00	9.00	10.00	11.00	12.00
Friis model(dB)	86	92	96	98	100	102	103	104	104	105	106	107	108
Okumura-Hata(dB)	113	121	126	130	132	135	137	138	138	140	141	142	143

TABLE 4: Path loss prediction along route C.

LOS(Km)	1.02	2.00	3.00	3.99	5.00	6.00	6.98	7.01	8.01	8.19	8.65
Friis model(dB)	86	92	96	98	100	102	103	103	104	104	105
Okumura-Hata(dB)	113	121	126	130	132	135	137	137	138	139	139

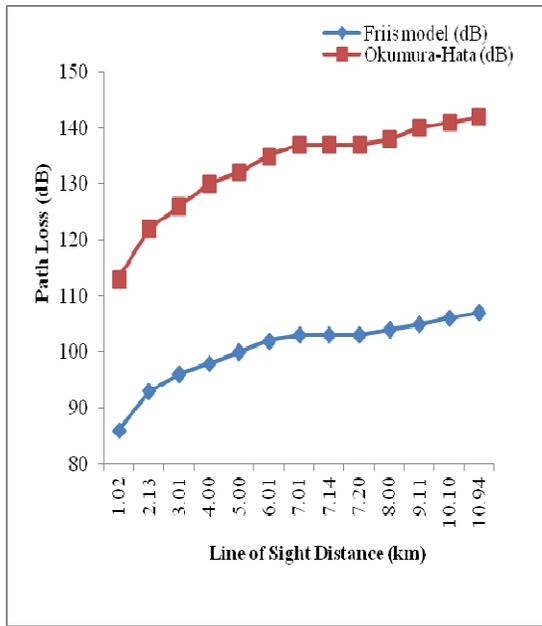


FIGURE 1: Graph of Path Loss against Line of Sight along route A.

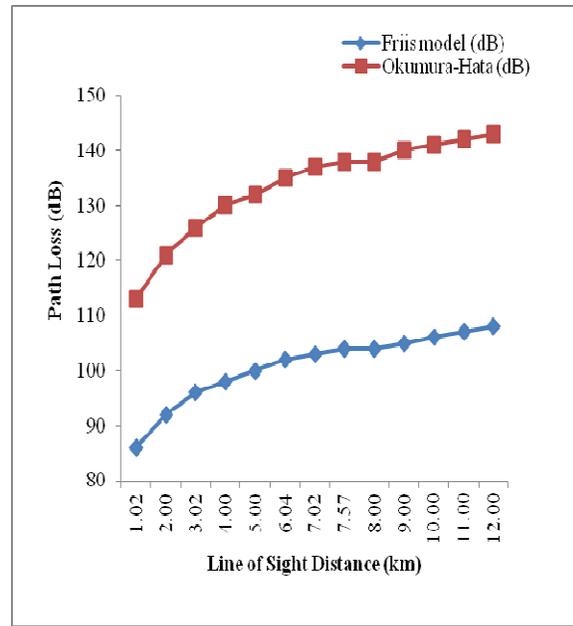


FIGURE 2: Graph of Path Loss against Line of Sight along route B.

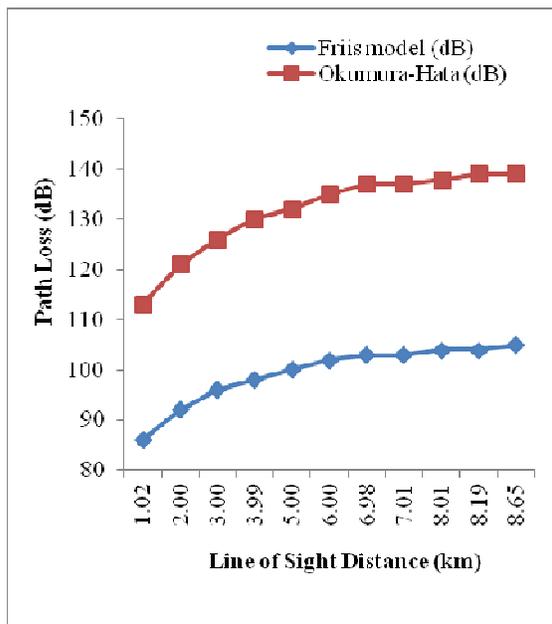


FIGURE 3: Graph of Path Loss against Line of Sight along route C.

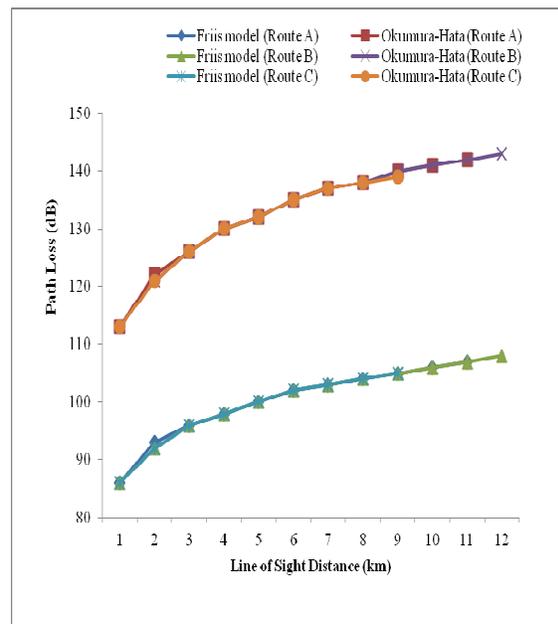


FIGURE 4: Graph of Path Loss against Line of Sight along routes A, B and C.

With ordinary least square (OLS) regression analyses carried out on the data presented in Tables 2, 3 and 4, the following equations of path loss for the graphs were derived:

$$L_{Fa} = 93.33 + 1.08 \times LOS \tag{4}$$

$$L_{Oa} = 122.99 + 1.52 \times LOS \tag{5}$$

$$L_{F_b} = 93.04 + 1.11 \times \text{LOS} \tag{6}$$

$$L_{O_b} = 122.48 + 1.57 \times \text{LOS} \tag{7}$$

$$L_{F_c} = 87.59 + 2.16 \times \text{LOS} \tag{8}$$

$$L_{O_c} = 114.75 + 3.09 \times \text{LOS} \tag{9}$$

From the equations above, L_{F_a} , L_{F_b} , and L_{F_c} are the Friis transmission path losses along routes A, B and C respectively; L_{O_a} , L_{O_b} and L_{O_c} are Okumura-Hata model path losses also along routes A, B and C respectively and **LOS** is the line of sight. The equations above, when applied, gave the approximate values of the predicted path loss data on tables 2, 3 and 4.

B. Comparison with Measurements

The corresponding error statistics in terms of the mean prediction error are shown in the tables 5, 6 and 7. The prediction errors were calculated as the difference between the measurement and prediction. Tables 5, 6 and 7 compare the path loss obtained along Route A, B and C respectively against the measured values. They clearly show that both Friis and Hata’s model under predict the path loss with Friis’s model grossly under predicting the path loss.

TABLE 5: Comparison of path loss of empirical models with measurements along route A.

	FRIIS MODEL	OKUMURA-HATA
Path Loss Mean Error (dB)	54.83	22.35

TABLE 6: Comparison of path loss of empirical models with measurements along route B.

	FRIIS MODEL	OKUMURA-HATA
Path Loss Mean Error (dB)	52.33	18.97

TABLE 7: Comparison of path loss of empirical models with measurements along route C.

	FRIIS MODEL	OKUMURA-HATA
Path Loss Mean Error (dB)	59.00	26.63

C. The Developed Model

From the tables 5, 6 and 7, Hata’s model gave a closer prediction to the measurement in all the routes and so suitable for path loss prediction in the locations. Friis transmission equation gives mean errors of 54.83 dB, 52.33 dB, 59.00 dB with Okumura-Hata model giving mean errors of 21.33 dB, 19.17 dB and 25.40 dB along routes A, B and C respectively. The mean deviation errors were added to the original Okumura-Hata model to generate a path loss model suitable for prediction along the routes under observation in Akure metropolis. The original Okumura-Hata model from equations (2) and (3), with **L** being the path loss is given by:

$$L = 69.55 + 26.16 \log f - 13.82 \log h_B - a(h_M) + [44.9 - 6.55 \log h_B] \log d \tag{10}$$

Therefore, with L_A , L_B , and L_C representing the path loss along routes A, B, and C respectively and all other terms remain as previously defined in equations (2) and (3); the following modified Okumura-Hata models were developed for the three routes under observation in Akure metropolis:

$$L_A = 69.55 + 26.16 \log f - 13.82 \log h_B - a(h_M) + [44.9 - 6.55 \log h_B] \log d + 22.35 \text{ dB} \quad (11)$$

$$L_B = 69.55 + 26.16 \log f - 13.82 \log h_B - a(h_M) + [44.9 - 6.55 \log h_B] \log d + 18.97 \text{ dB} \quad (12)$$

$$L_C = 69.55 + 26.16 \log f - 13.82 \log h_B - a(h_M) + [44.9 - 6.55 \log h_B] \log d + 26.63 \text{ dB} \quad (13)$$

D. Comparative Evaluation

The Friis transmission equation is a simple and idealistic model which assumes free space propagation where radio waves travel from the transmitter to the receiver without being affected by any obstacles in the radio wave channel [10]. However, the investigated routes are built-up urban areas hence why the model grossly under predicted the path loss as shown in tables 5, 6 and 7.

Okumura-Hata model, on the other hand, takes into consideration more factors which affect signal attenuation, particularly the environmental factors such as terrain characteristics [11]. However, the simplified model used in this work replaces the effective base station antenna height with the transmitting antenna height, by not considering the terrain characteristics. Also, the height of the broadcasting base station used in this work is 323.1m which is outside the model's specification range for transmitter height (30 – 200m). This also may have contributed to the path loss error/deviation between the analytical and the field measurement values.

E. Simulation Results

Figures 1, 2 and 3 show the plots of path loss (dB) as a function of line of sight separation distance (km) between the transmitter (base station) and the receiver (mobile station) along routes A, B and C respectively. Each of the figures reveals that path loss increases with increasing separation distance. This agrees with the work of Nchimunya *et al* [12] which revealed that radio wave signal attenuates more with distance, though with consideration of other factors too.

Figure 4 then shows the overall plots of the path loss against separation distance for the three routes investigated in this work, and it reveals that the plots almost perfectly overlap. The observable slight difference can be attributed to differences in the terrain characteristics of the investigated routes. The work of Meng *et al* [13] carried out on palm plantation and rain forest terrains supports this.

5. CONCLUSION

Two empirical propagation models; the Friis transmission equation and Okumura-Hata model, were used to predict the path loss at some locations along three different routes in Akure metropolis and the results that were obtained established the fact that attenuation of electromagnetic waves increases as the wave fronts move farther away from the transmitter. Measurements taken were compared with the predictions made by the two propagation models used. Friis transmission equation showed large mean path loss error and hence grossly under predicted the path loss. Okumura-Hata's model showed closer agreement with measurement results with lower mean path loss errors. Hata's model shows that it is more suitable for use in path loss prediction in Akure metropolis giving the least error of 19.17 dB and showing the closest curve to the measured result. With the mean error values gotten, a modified Hata path loss model for all the routes under observation was developed. The models developed in this work, as presented in (11), (12) and (13) reveal that the path loss is also a function of the route or terrain, as evident in the different values for the different routes. It is also dependent on the antenna-height effect. Future works can be done to factor in these effects in a generalized modified model which will incorporate terrain characteristics and also cater for the effect of antenna height outside

the specification range of the Okumura-Hata model and this will be an outstanding future research work.

6. REFERENCES

- [1] Famoriji J. Oluwole and Olasoji Y. Olajide, "Radio Frequency Propagation Mechanisms and Empirical Models for Hilly Areas", *Canadian Journal on Electrical and Electronics Engineering*, Vol. 4, No. 2, Canada, April 2013, PP. 65-70.
- [2] Fleury, B. H. and Leuthold, P. E.(1996). Radiowave Propagation in Mobile Communications: An Overview of European Research, *IEEE Communications Magazine*, pp 70-81.
- [3] Olorunnibi E.D., Path Loss Prediction Model for UHF Radio Waves in Akure Metropolis, A dissertation, Electrical and Electronic Engineering of the Federal University of Technology, Akure, Nigeria (2010).
- [4] Rappaport S.T., Scott Y.S., and Rajendra S., 900-MHz Multipath Propagation Measurements for U.S. Digital Cellular Radio Telephone, *IEEE Transactions on Vehicular Technology*, 39(2), 132-139 (1990)
- [5] Ramakrishna J., Path Loss Predictions in the Presence of Buildings on Flat Terrain; A 3D Vector Parabolic Equation Approach", *IEEE Transactions on Antennas and propagation*, 51(8), 1716-1728. (2003)
- [6] Nešković A, Nešković N, and Djordic Paunović "Macrocell electric field strength prediction model based upon artificial neural networks", *IEEE Journal on Selected Areas in Communications*, 20(6), 1170-1177 (2002)
- [7] Vijay Garg (2007): "Wireless Communications and Networking", Morgan Kaufmann Publishers, San Francisco, CA 94111.
- [8] Adenike Folaponmile (2010): "Macrocell Path Loss Model for Tropical Savannah", *Journal of Research and National Development* Vol. 8, No 1, June, 2010.
- [9] GARMIN GPS Map 76 (2005): "Owner's Manual and Reference", GARMIN Cooperation, USA, 2005.
- [10] Guilberth Martinez Vargas. "Development and Performance Evaluation of a Frequency-Agile Test Network" Master Thesis, RWTH Aachen University, 2009
- [11] Erik Östlin. "On Radio Wave Propagation Measurements and Modelling for Cellular Mobile Radio Networks", Doctoral Dissertation, Blekinge Institute of Technology, Sweden, 2009
- [12] Nchimuya Chaamwe, Wenyu Liu and Hongbo Jiang. "Wave Propagation Communication Models for Wireless Underground Sensor Networks"
- [13] Meng Y. S, Lee Y. H and Ng B. C (2010). "Path Loss Modeling for Near-Ground VHF Radio wave Propagation through Forests with Tree-Canopy Reflection Effect", *Progress In Electromagnetics Research M*, Vol. 12, 131-141, 2010.

INSTRUCTIONS TO CONTRIBUTORS

The *International Journal of Engineering (IJE)* is devoted in assimilating publications that document development and research results within the broad spectrum of subfields in the engineering sciences. The journal intends to disseminate knowledge in the various disciplines of the engineering field from theoretical, practical and analytical research to physical implications and theoretical or quantitative discussion intended for both academic and industrial progress.

Our intended audiences comprises of scientists, researchers, mathematicians, practicing engineers, among others working in Engineering and welcome them to exchange and share their expertise in their particular disciplines. We also encourage articles, interdisciplinary in nature. The realm of International Journal of Engineering (IJE) extends, but not limited, to the following:

To build its International reputation, we are disseminating the publication information through Google Books, Google Scholar, Directory of Open Access Journals (DOAJ), Open J Gate, ScientificCommons, Docstoc and many more. Our International Editors are working on establishing ISI listing and a good impact factor for IJE.

The initial efforts helped to shape the editorial policy and to sharpen the focus of the journal. Starting with Volume 8, 2014, IJE will appear with more focused issues. Besides normal publications, IJE intend to organized special issues on more focused topics. Each special issue will have a designated editor (editors) – either member of the editorial board or another recognized specialist in the respective field.

We are open to contributions, proposals for any topic as well as for editors and reviewers. We understand that it is through the effort of volunteers that CSC Journals continues to grow and flourish.

IJE LIST OF TOPICS

The realm of International Journal of Engineering (IJE) extends, but not limited, to the following:

- Aerospace Engineering
- Biomedical Engineering
- Civil & Structural Engineering
- Control Systems Engineering
- Electrical Engineering
- Engineering Mathematics
- Environmental Engineering
- Geotechnical Engineering
- Manufacturing Engineering
- Mechanical Engineering
- Nuclear Engineering
- Petroleum Engineering
- Telecommunications Engineering
- Agricultural Engineering
- Chemical Engineering
- Computer Engineering
- Education Engineering
- Electronic Engineering
- Engineering Science
- Fluid Engineering
- Industrial Engineering
- Materials & Technology Engineering
- Mineral & Mining Engineering
- Optical Engineering
- Robotics & Automation Engineering

CALL FOR PAPERS

Volume: 8 - Issue: 4

i. Paper Submission: May 31, 2014 **ii. Author Notification:** June 30, 2014

iii. Issue Publication: July 2014

CONTACT INFORMATION

Computer Science Journals Sdn Bhd

B-5-8 Plaza Mont Kiara, Mont Kiara

50480, Kuala Lumpur, MALAYSIA

Phone: 006 03 6204 5627

Fax: 006 03 6204 5628

Email: cscpress@cscjournals.org

CSC PUBLISHERS © 2014
COMPUTER SCIENCE JOURNALS SDN BHD
B-5-8 PLAZA MONT KIARA, MONT KIARA
50480, KUALA LUMPUR
MALAYSIA

PHONE: 006 03 6204 5627
FAX: 006 03 6204 5628
EMAIL: cscpress@cscjournals.org