

Volume 5 • Issue 1 • February 2014

Editor-in-Chief Dr. Bekir Karlik

INTERNATIONAL JOURNAL OF
**ARTIFICIAL INTELLIGENCE AND
EXPERT SYSTEMS (IJAE)**

ISSN : 2180-124X

Publication Frequency: 6 Issues / Year

CSC PUBLISHERS
<http://www.cscjournals.org>

INTERNATIONAL JOURNAL OF ARTIFICIAL INTELLIGENCE AND EXPERT SYSTEMS (IJAE)

VOLUME 5, ISSUE 1, 2014

**EDITED BY
DR. NABEEL TAHIR**

ISSN (Online): 2180-124X

International Journal of Artificial Intelligence and Expert Systems (IJAE) is published both in traditional paper form and in Internet. This journal is published at the website <http://www.cscjournals.org>, maintained by Computer Science Journals (CSC Journals), Malaysia.

IJAE Journal is a part of CSC Publishers

Computer Science Journals

<http://www.cscjournals.org>

INTERNATIONAL JOURNAL OF ARTIFICIAL INTELLIGENCE AND EXPERT SYSTEMS (IJAE)

Book: Volume 5, Issue 1, February 2014

Publishing Date: 11-02-2014

ISSN (Online): 2180-124X

This work is subjected to copyright. All rights are reserved whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, re-use of illustrations, recitation, broadcasting, reproduction on microfilms or in any other way, and storage in data banks. Duplication of this publication of parts thereof is permitted only under the provision of the copyright law 1965, in its current version, and permission of use must always be obtained from CSC Publishers.

IJAE Journal is a part of CSC Publishers

<http://www.cscjournals.org>

© IJAE Journal

Published in Malaysia

Typesetting: Camera-ready by author, data conversion by CSC Publishing Services – CSC Journals, Malaysia

CSC Publishers, 2014

EDITORIAL PREFACE

The International Journal of Artificial Intelligence and Expert Systems (IJAE) is an effective medium for interchange of high quality theoretical and applied research in Artificial Intelligence and Expert Systems domain from theoretical research to application development. This is the *First Issue of Volume Five* of IJAE. The Journal is published bi-monthly, with papers being peer reviewed to high international standards. IJAE emphasizes on efficient and effective Artificial Intelligence, and provides a central for a deeper understanding in the discipline by encouraging the quantitative comparison and performance evaluation of the emerging components of Expert Systems. IJAE comprehensively cover the system, processing and application aspects of Artificial Intelligence. Some of the important topics are AI for Service Engineering and Automated Reasoning, Evolutionary and Swarm Algorithms and Expert System Development Stages, Fuzzy Sets and logic and Knowledge-Based Systems, Problem solving Methods Self-Healing and Autonomous Systems etc.

The initial efforts helped to shape the editorial policy and to sharpen the focus of the journal. Started with Volume 5, 2014, IJAE appears with more focused issues related to artificial intelligence and expert system research. Besides normal publications, IJAE intend to organized special issues on more focused topics. Each special issue will have a designated editor (editors) – either member of the editorial board or another recognized specialist in the respective field.

IJAE give an opportunity to scientists, researchers, and vendors from different disciplines of Artificial Intelligence to share the ideas, identify problems, investigate relevant issues, share common interests, explore new approaches, and initiate possible collaborative research and system development. This journal is helpful for the researchers and R&D engineers, scientists all those persons who are involve in Artificial Intelligence and Expert Systems in any shape.

Highly professional scholars give their efforts, valuable time, expertise and motivation to IJAE as Editorial board members. All submissions are evaluated by the International Editorial Board. The International Editorial Board ensures that significant developments in image processing from around the world are reflected in the IJAE publications.

IJAE editors understand that how much it is important for authors and researchers to have their work published with a minimum delay after submission of their papers. They also strongly believe that the direct communication between the editors and authors are important for the welfare, quality and wellbeing of the Journal and its readers. Therefore, all activities from paper submission to paper publication are controlled through electronic systems that include electronic submission, editorial panel and review system that ensures rapid decision with least delays in the publication processes.

To build its international reputation, we are disseminating the publication information through Google Books, Google Scholar, Directory of Open Access Journals (DOAJ), Open J Gate, ScientificCommons, Docstoc and many more. Our International Editors are working on establishing ISI listing and a good impact factor for IJAE. We would like to remind you that the success of our journal depends directly on the number of quality articles submitted for review. Accordingly, we would like to request your participation by submitting quality manuscripts for review and encouraging your colleagues to submit quality manuscripts for review. One of the great benefits we can provide to our prospective authors is the mentoring nature of our review process. IJAE provides authors with high quality, helpful reviews that are shaped to assist authors in improving their manuscripts.

Editorial Board Members

International Journal of Artificial Intelligence and Expert Systems (IJAE)

EDITORIAL BOARD

EDITOR-in-CHIEF (EiC)

Dr. Bekir Karlik
Mevlana University (Turkey)

ASSOCIATE EDITORS (AEiCs)

Assistant Professor. Tossapon Boongoen
Royal Thai Air Force Academy
Thailand

Assistant Professor. Ihsan Omur Bucak
Mevlana University
Turkey

Professor Ahmed Bouridane
Northumbria University
United Kingdom

Associate Professor, Ashraf Anwar
University of Atlanta
United States of America

Professor Chengwu Chen
National Kaohsiung Marine University
Taiwan

EDITORIAL BOARD MEMBERS (EBMs)

Professor Yevgeniy Bodyanskiy
Kharkiv National University of Radio Electronics
Ukraine

Assistant Professor. Bilal Alatas
Firat University
Turkey

Associate Professor Abdullah Hamed Al-Badi
Sultan Qaboos University
Oman

Dr. Salman A. Khan
King Fahd University of Petroleum & Minerals
Saudi Arabia

Assistant Professor Israel Gonzalez-Carrasco
Universidad Carlos III de Madrid
Spain

Dr. Alex James

Indian Institute of Information Technology and Management- Kerala
India

Assistant Professor Dr Zubair Baig

King Fahd University
Saudi Arabia

Associate Professor Syed Saad Azhar Ali

Iqra University
Pakistan

Assistant Professor Israel Gonzalez-Carrasco

Universidad Carlos III de Madrid
Spain

Professor Sadiq M. Sait

King Fahd University
Saudi Arabia

Professor Hisham Al-Rawi

University of Bahrain
Bahrain

Dr. Syed Zafar Shazli

Northeastern University
United States of America

Associate Professor Kamran Arshad

University of Greenwich
United Kingdom

Associate Professor, Mashtalir Sergii

Kharkiv National University of Radio Electronics
Ukraine

S.Bhuvaneswari

Pondicherry University
India

Dr Alejandro Rodriguez Gonzalez

Polytechnic University of Madrid
Spain

Assistant Professor, Jose Luis Lopez-Cuadrado

Universidad Carlos III de Madrid
Spain

Assistant Professor, Ilhan AYDIN

Firat University
Turkey

Associate Professor, Afaq Ahmed

Sultan Qaboos University
Oman

Dr. Muhammad Ali Imran
University of Surrey
United Kingdom

TABLE OF CONTENTS

Volume 5, Issue 1, February 2014

Pages

- 1 - 14 Computational Intelligence Approach for Predicting the Hardness Performances in Titanium Aluminium Nitride (TiAlN) Coating Process
Muhammad 'Arif Mohamad, Nor Azizah Ali, Habibollah Haron

Computational Intelligence Approach for Predicting the Hardness Performances in Titanium Aluminium Nitride (TiAlN) Coating Process

Muhammad 'Arif Mohamad

*Faculty of Computing
University Teknologi Malaysia
UTM Skudai, 81310, Malaysia*

marif49@live.utm.my

Nor Azizah Ali

*Faculty of Computing
University Teknologi Malaysia
UTM Skudai, 81310, Malaysia*

nzah@utm.my

Habibollah Haron

*Faculty of Computing
University Teknologi Malaysia
UTM Skudai, 81310, Malaysia*

habib@utm.my

Abstract

This paper presents a computational approach on predicting of hardness performances for Titanium Aluminium Nitride (TiAlN) coating process. A new application in predicting the hardness performances of TiAlN coatings using a method called Support Vector Machine (SVM) and Artificial Neural Network (ANN) is implemented. TiAlN coatings are usually used in high-speed machining due to its excellent properties in surface hardness and wear resistance. Physical Vapor Deposition (PVD) magnetron sputtering process has been used to produce the TiAlN coatings. Based on the experimental dataset of previous work, the SVM and ANN model is used in predicting the hardness of TiAlN coatings. The influential factors of three coating process parameter namely substrate sputtering power, substrate bias voltage and substrate temperature were selected as input while the output parameter is the hardness. The results of proposed SVM and ANN models are compared to the experimental result and the hybrid RSM-Fuzzy model from previous work. The comparisons of SVM and ANN models against hybrid RSM-Fuzzy were based on predictive performances in order to obtain the most accurate model for prediction of hardness in TiAlN coating. In terms of predictive performance evaluation, four performances matrix were applied that are percentage error, mean square error (MSE), co-efficient determination (R^2) and model accuracy. The result has proved that the proposed SVM model shows the better result compared to the ANN and hybrid RSM-fuzzy model. The good performances of the results obtained by the SVM method shows that this method can be applied for prediction of hardness performances in TiAlN coating process with better predictive performances compared to ANN and hybrid RSM-Fuzzy.

Keywords: Support Vector Machine, Artificial Neural Network, RSM-Fuzzy, Hardness, TiAlN coatings, PVD Magnetron Sputtering.

1. INTRODUCTION

Nowadays coated material is widely used due to its excellent properties in surface roughness, hardness and tool wear. A particular study has indicated that coated tool wear performance is forty times better than the uncoated tools [1]. Generally, the performance of the coated tool is depending on the wear mechanism, hardness and adhesion, and tool life. Hardness is one of the characteristic of coated tool and it very important in order to reduce the tool wear [2].

The hardness performances can be improved by applying the thin film coating on the cutting tool. The main purpose of the thin film coating application is to improve the hardness performances. Meanwhile this application improves the tool surface properties while maintaining its bulks properties [2]. Physical Vapor Deposition (PVD) magnetron sputtering is the general coating process in applying thin film for hard coating purpose.

In PVD magnetron sputtering, the process parameters that influence the coating performance are sputtering power, substrate temperature, substrate bias voltage, turntable speed and gas temperature [3-6]. To produce a good coating it is required the selection of values of coating process parameter. However, due to the best our knowledge, there are no methods that can be determining the parameters values accurately. By using the traditional approach, that is, through lab experiments, it involved lots of money and time because we need to conduct a few lab experiments until we obtained the best values. In other words, these conditions require trial and error process in order to determine the suitable parameters value for the material used, so that we could obtain the best coating performance. The trial and error process have resulted in the increase of coating process cost and more intricate process of customization in coating.

Therefore, with the help of computational approach that evolve nowadays, the coating process can be done in difference ways with the same objective. Using the computational approaches in estimating coating process performances, there is no traditional lab experiment need to be conducted and hence the coating process cost can be reduced. Thus, previous work conducted by Jaya et al. (2011), they proposed the hybridization RSM-Fuzzy method for prediction of hardness performance in TiA1N coating [7]. This model has achieved 88.49% accuracy compared to the experimental result. In addition, from literature survey, we found that another computational-based approach such as Support Vector Machine (SVM) and Artificial Neural Network (ANN) could be applied for the same purpose and might produce better accuracy.

To the best of our knowledge, no such work has been conducted to explore the ability of SVM and ANN in this particular matter. Thus, this study aims to explore these two methods to predict the value of parameters of hardness in TiA1N coating process. At the end of this study, the prediction results from SVM and ANN will be compared with the hybrid RSM-Fuzzy method. The comparison analysis will be based on predictive performances. In terms of predictive performance evaluation, four performances matrix will be applied were percentage error, mean square error (MSE), co-efficient determination (R^2) and model accuracy.

2. EXPERIMENTAL DESIGN

This section focuses on the experimental design that has been used in this study. The emphasis is on the prediction of hardness performances in Titanium Aluminium Nitride TiA1N coating process using two computational intelligence techniques, Support Vector Machine (SVM) and Artificial Neural Network (ANN). Based the literature, SVM and ANN were demonstrated its efficiency and reliability in prediction. Therefore, a proper experimental design must be carried out before the implementation of this study. It consists of five main phases which are problem definition, data definition and collection, model development, model validation and evaluation of predictive performance.

3. DATA DEFINITION

For this study, the result from the previous work [7] which are the value of hardness of TiA1N coating process were found using experimental approach is referred. The datasets used are the experimental result of TiA1N coating process. The datasets contains 20 instances as shown in TABLE 1. This instance has been used in this study as input/output data for the developed model using SVM and ANN.

TABLE 1: Referred Dataset Obtained from Previous Work by Jaya et al. (2011).

No of Dataset	Process Parameters			Output
	Sputter Power (kW)	Bias Voltage (Volts)	Substrate Temp. (°C)	Hardness Value (GPa)
1	6.00	50.00	400.00	3.54
2	4.81	100.67	518.92	5.27
3	4.81	249.33	281.08	13.17
4	6.00	175.00	400.00	10.96
5	6.00	175.00	200.00	8.06
6	4.81	100.67	281.08	4.33
7	7.19	249.33	281.08	4.04
8	6.00	175.00	400.00	16.12
9	6.00	175.00	400.00	7.77
10	4.81	249.33	518.92	3.53
11	7.19	100.67	281.08	9.76
12	6.00	175.00	600.00	7.48
13	7.19	249.33	518.92	15.26
14	6.00	175.00	400.00	8.91
15	8.00	175.00	400.00	22.64
16	6.00	300.00	400.00	14.14
17	7.19	100.67	518.92	8.88
18	4.00	175.00	400.00	15.69
19	6.00	175.00	400.00	11.27
20	6.00	175.00	400.00	12.34

In validating the performances of the models, three testing dataset were used. This three testing dataset were obtained from separated experimental [7]. This new three separated dataset is used instead of early 20 dataset to validating the performances of the RSM-Fuzzy model in order to avoid the model biasing the result. So, in validating the performances of SVM and ANN model, similar dataset were used. From TABLE 2, its shows the testing dataset were used to validate the predictive performances of prediction model.

TABLE 2: Testing Dataset for Evaluation of Predictive Performance.

No of Dataset	Input			Output
	Power (kW)	Voltage (Volt)	Temp (°C)	Hardness (Gpa)
1	5.0	100	280	5.2
2	6.5	150	350	10.3
3	7.0	145	450	14.2

4. MODELLING PROCESS

4.1 Artificial Neural Network

Neural networks, as used in artificial intelligence, have traditionally been viewed as simplified models of neural processing in the human brain. It is accepted by the most scientists that the human brain is a type of computer. The origins of neural networks are based on efforts to model information processing in biological systems, which may rely largely on parallel processing as well as implicit instructions based on recognition of patterns of sensory input from external sources.

Human body consists of trillions of cells. A portion of them is the nerve cells called neurons. These neurons have different shapes and sizes [8]. A neuron collects signals from others through fine structures called dendrites. The neuron sends out spikes of electrical activity through a long, thin stand known as axon, which splits into thousands of branches. At the end of each branch, a structure called a synapse converts the activity from the axon into electrical effects that inhibit or excite activity in the connected neurons. When a neuron receives excitatory input that is sufficiently large compared with its inhibitory input, it sends a spike of electrical activity down its axon. Learning occurs by changing the effectiveness of the synapses so that the influence of one neuron on another changes.

4.2 Backpropagation

In this study, BP learning algorithm, which has a unique learning principle, generally called delta rule, is used, FIGURE 1 depicts a schematic illustration of BP networks. The three layer of the network architecture include the input layer, hidden layer and output layer. Layers include several processing units known as neurons. They are connected with each other by variable weights to be determined. In the network, the input layer receives information from external source and passes this information to the network for processing. The hidden layer receives from the input layer, and does all information processing. The output layer receives processed information from the network, and sends the results to an external receptor [9]. In the network, each neuron receives total input from all of the neurons in the proceeding layer as:

$$net_j = \sum_i W_{ji}^{(n)} X_i^{(n-1)} \tag{1}$$

Where net_j is the total or net input, $X_j^{(n)}$ is the output of the node j in the n th layer, and $W_{ji}^{(n)}$ represents the weights from node i in the $(n-1)$ th layer to node j in the n th layer. A neuron in the network produces its input by processing the net input through an activation (transfer) function which is usually nonlinear. There are several types of activation functions used for BP. However,

the sigmoidal activation function is most utilized. Three types of sigmoid functions are usually used, as follows [10]:

$$f(x) = \frac{1}{1+e^{-x}} \quad \text{range } (0,1) \quad (2)$$

$$f(x) = \frac{2}{1+e^{-x}} - 1 \quad \text{range } (-1,1) \quad (3)$$

$$f(x) = \frac{e^x - e^{-x}}{e^x + e^{-x}} \quad \text{range } (-1,1) \quad (4)$$

the weights are dynamically updated using the BP algorithm. The difference between the target output and actual output (learning error) for a sample p is [7]

$$E_p = \frac{1}{2} \sum_{k=1}^K (d_{pk} - o_{pk})^2 \quad (5)$$

where d_{pk} and o_{pk} are the desired and calculated output for k th output, respectively. K denotes the number of neuron in output of network. The average error for whole system is obtained by:

$$E_p = \frac{1}{2} \sum_{p=1}^P \sum_{k=1}^K (d_{pk} - o_{pk})^2 \quad (6)$$

where P is the total number of instances. For the purpose of minimizing E_p , the weights of the inter-connections are adjusted during the training procedure until the expected error is achieved. To adjust the weights of the networks, the process starts at the output neuron and works backward to the hidden layer. The weights in BP based on the delta learning rule can be expressed as follows:

$$w_{ij}^{new} = w_{ij}^{old} + \Delta w_{ij} \quad (7)$$

$$\Delta w_{ij} = -\eta \frac{\partial E_p}{\partial w_{ij}} out_j \quad (8)$$

where out_j the j th neuron output. η is the learning rate parameter controlling stability and rate of convergence of the network, which is a constant between 0 and 1. Once the weights of all the links of the network are decided, the decision mechanism is then developed.

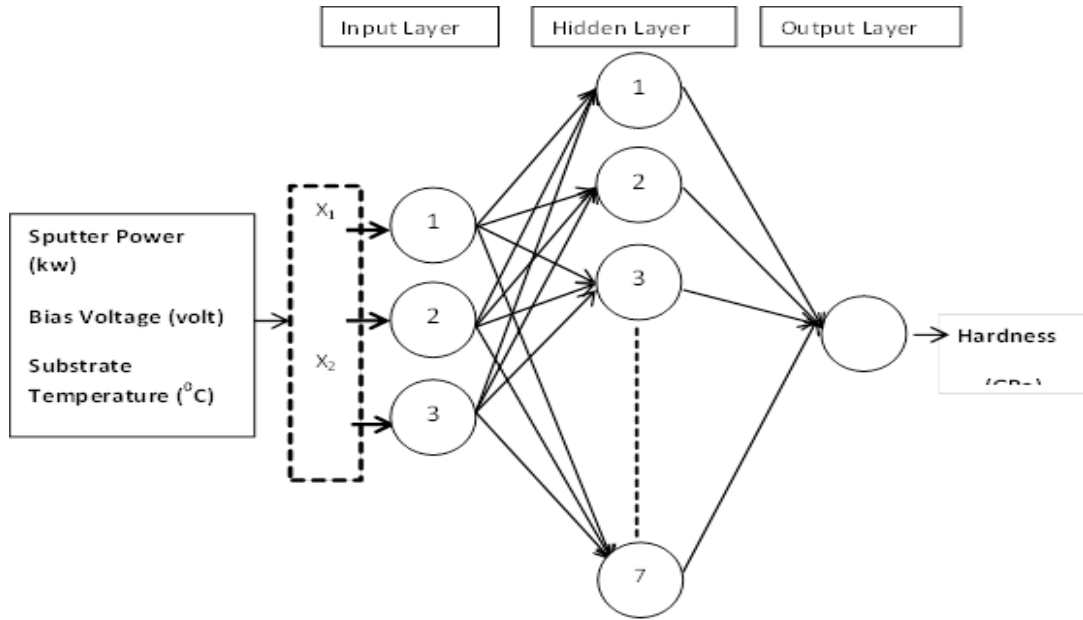


FIGURE 1: Schematic illustration of artificial neural network model for the Hardness.

4.3 Support Vector Machine

The basic theory of regression function of SVM can be express as [11-14].

$$y = f(x) = \omega \cdot x + b \quad (9)$$

where ω is a weight vector, b is bias, x is multivariate input and y is scalar output. By introducing slack variables, ξ and ξ^* , the SVM model can be expressed as follows:

$$\begin{aligned} \text{Minimize} \quad & \Phi(\omega) = \frac{1}{2} \|\omega\|^2 + C \sum_{i=1}^n (\xi_i + \xi_i^*), C \geq 0 \\ \text{Subject to} \quad & y_i - \omega \cdot x_i - b \leq \varepsilon + \xi_i, \\ & \omega \cdot x_i + b - y_i \leq \varepsilon + \xi_i^*, i = 1, 2, \dots, l \\ & \xi_i, \xi_i^* \geq 0, \end{aligned} \quad (10)$$

where C is a positive constant (regularization parameter), and ε is loss function.

$$y = f(x) = \sum_{i=1}^n (\alpha_i - \alpha_i^*) (x_i \cdot x) + b \quad (11)$$

By applying the Lagrange multiplier method, the solution to above SVM model is obtained as the following equations:

$$L(\omega, b, \xi, \xi^*) = \frac{1}{2} \|\omega\|^2 + C \sum_{i=1}^n (\xi_i + \xi_i^*) - \sum_{i=1}^n \alpha_i (\varepsilon_i + \xi_i - y_i + \omega \cdot x_i + b) - \sum_{i=1}^n \alpha_i^* (y_i + \varepsilon_i + \xi_i - \omega \cdot x_i - b) - \sum_{i=1}^n (\eta_i \xi_i + \eta_i^* \xi_i^*) \quad (12)$$

where $\alpha_i, \alpha_i^*, \eta_i, \eta_i^*$ are Lagrange Multiplier. Hence dual problem is:

$$\text{Maximize } Q(\alpha) = \sum_{i=1}^n y_i (\alpha_i - \alpha_i^*) - \varepsilon \sum_{i=1}^n (\alpha_i - \alpha_i^*) - \frac{1}{2} \sum_{i=1}^n (\alpha_i - \alpha_i^*) (x_i \cdot x_j)$$

Subject to

$$\begin{cases} \sum_{i=1}^n y_i (\alpha_i - \alpha_i^*) = 0, \\ 0 \leq \alpha_i \leq \varepsilon, \\ 0 \leq \alpha_i^* \leq \varepsilon, \end{cases} \quad i = 1, 2, \dots, n \quad (13)$$

Regression function is:

$$f(x) = \sum_{i=1}^n (\alpha_i - \alpha_i^*) (x_i, x) + b \quad (14)$$

Nonlinear regression function is:

$$f(x) = \sum_{i=1}^n (\alpha_i - \alpha_i^*) K(x_i, x) + b \quad (15)$$

When using a mapping function, the solution of $K(x_i, x)$ in the eq. (7) can be change into $K(x_i, x) = (\varphi(x_i), \phi(x))$ where K is a kernel function while b is bias and n is number of support vector. In SVM, kernel function enables the dot product to be performed in high dimensional feature space using low-dimensional space data input without knowing the value of ϕ . A good SVM regression model with high prediction and stability always come with a proper parameter setting [15]. The review had shown that RBF kernel function in the most common used by researchers.

Kernel function plays a crucial role in SVM and its performances. The right selection of kernel function will affect the accuracy of prediction model. Basically, the idea of kernel function is to enable the operations to be performed in the input space rather than the potentially high dimensional future space. So that, the inner products does not need to be evaluated in the future space. Function that used in SVM as a kernel function must satisfy Mercer's theorem [16, 17].

In developing SVM model, there are a few parameters that should be considered, namely, regularization parameters C and γ value. Parameter C is the cost of the penalty [18]. The C parameter will control the trade-off between margin and the slack variable size while γ , which is a RBF kernel function parameter influences the partitioning outcome in the feature space. The choice of suitable parameters will affect the result of prediction model. Generally, there are a few steps in determining C and γ parameter, which are trial and error implementation, grid search and feature selection approach. Grid search is a conventional way to

determine parameter setting, it is an alternative method to find the best C and γ values when using RBF kernel function. However, grid search method is time consuming [19, 20].

Kernel parameter is important in SVM. In this study, RBF kernel function is chosen to model the hardness prediction of TiA1N coating. RBF is widely used due to its generalization effectiveness and also it has universal approximation properties. Thus this function has become a first choice chosen by many researchers. In addition, RBF significantly gives the good performance in practical problem solving.

In RBF kernel function, there are two parameters that will be considered namely C and γ . The selections of value for parameter C and γ will affect the accuracy of prediction result. Since, there is no standard method can be applied to determine the best value of that parameters, therefore in this research we used a trial and error approach in order to obtain the best value for the parameters. For this study, in order to get the SVM model, trial and error process need to be implemented accordingly with difference values of parameters. SVM regression function is used in this study in order to model the coating process parameter.

For model development, the input data was divided into training and testing dataset before the prediction process need to transform into sparse format which is accepted as data format in LIBSVM toolbox. To obtain the best prediction model, trial and error process was implemented continuously with difference values of C and γ parameters until we obtain highest correlation value which is considered as SVM best prediction model.

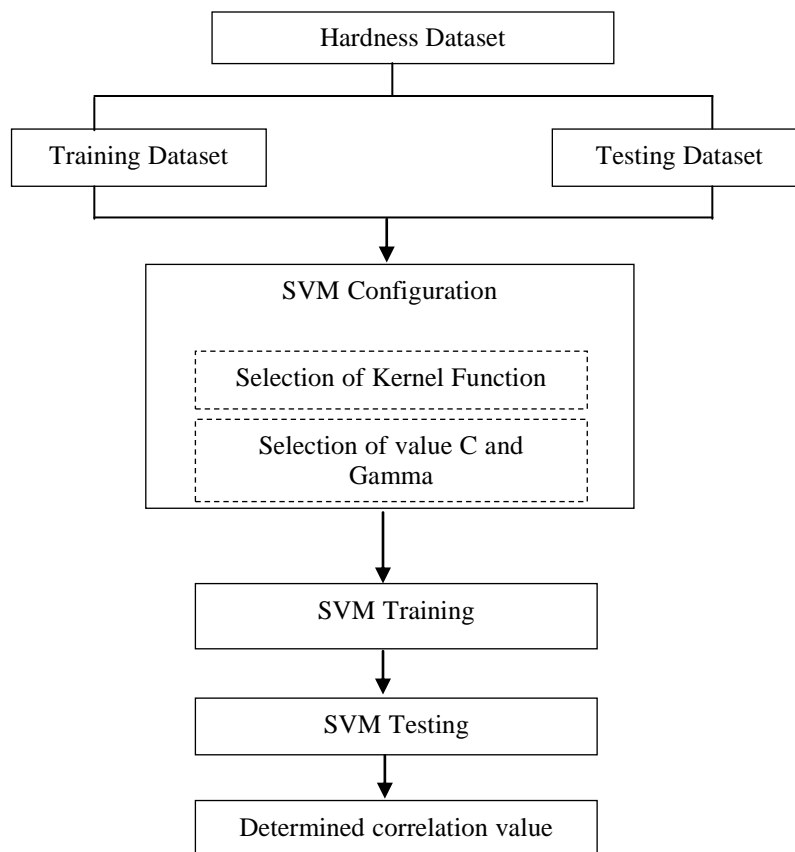


FIGURE 2: Framework of SVM Model.

5. PREDICTION RESULT

This section discussed the results obtained from SVM and ANN prediction model. The results obtained by these two models for predicting the hardness value of TiA1N coating were compared against actual experimental result. TABLE 3 shows the hardness values were generated by prediction models and the actual hardness value from the experimental result. Subsequently, FIGURE 3 illustrated the comparison of prediction result SVM and ANN against the actual experimental result for hardness TiA1N coating.

TABLE 3: Comparison of Experimental Result with SVM and ANN Model for Hardness Values.

No. of Dataset	Hardness Value (Gpa)		
	Experimental	SVM	ANN
1	3.54	3.54	3.54
2	5.27	5.27	5.27
3	13.17	13.17	13.17
4	10.96	10.97	10.94
5	8.06	8.06	8.06
6	4.33	4.33	4.33
7	4.04	4.04	4.04
8	16.12	10.97	10.94
9	7.77	10.97	10.94
10	3.53	3.53	3.53
11	9.76	9.76	9.76
12	7.48	7.48	7.48
13	15.26	15.26	15.26
14	8.91	10.97	10.94
15	22.64	22.64	14.91
16	14.14	14.14	9.99
17	8.88	8.89	13.60
18	15.69	15.69	5.67
19	11.27	10.97	10.94
20	12.34	10.97	10.94

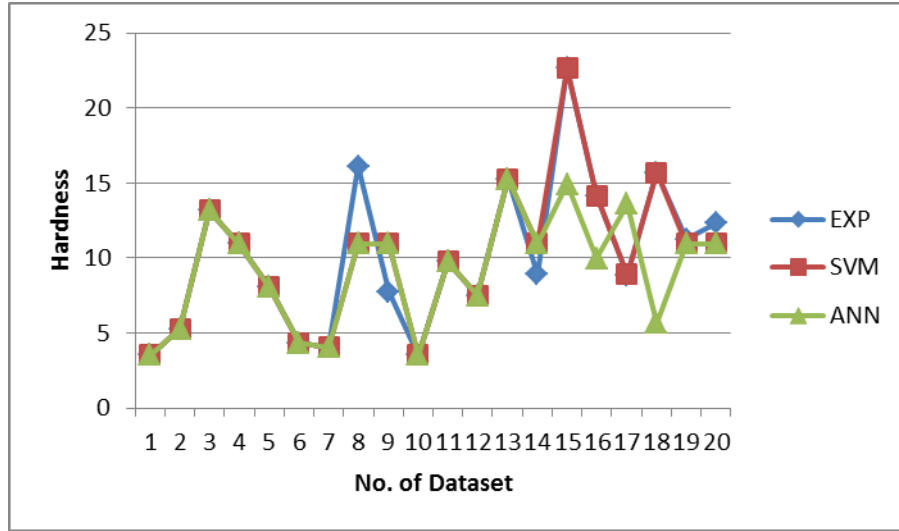


FIGURE 3: Comparison Experimental Result and SVM and ANN Prediction Result for Hardness TiAlN Coating.

6. PREDICTIVE PERFORMANCE

In this study, the following measures were used to calculate the model performances. The percentage error (δ) in (16) was used to observe the gap between actual and the hybrid models for individual value. The mean squared error (MSE) in (17) was used to quantify the difference between predicted and actual values. Meanwhile, the co-efficient determination (R^2) in (18) was calculated in order to see how well the future output response is likely to be predicted by the model. Lastly, the prediction accuracy (A) in (19) was computed to determine the accuracy of the models.

$$\delta_i = \left(\frac{|v_a - v_p|}{v_a} \right) \times 100\% \tag{16}$$

$$MSE = \frac{1}{n} \sum_{i=1}^n \left(|v_a - v_p| \right)^2 \tag{17}$$

$$R^2 = 1 - \left(\frac{\sum_{i=1}^n (v_a - v_p)^2}{\sum_{i=1}^n (v_p)^2} \right) \tag{18}$$

$$A = \frac{1}{n} \sum_{i=1}^n \left(1 - \frac{|v_a - v_p|}{v_a} \right) \times 100\% \tag{19}$$

Where n is number of testing data, v_a is experimental value and v_p is predicted value.

In validating the performances of the models, three testing dataset from separated experiment were used. From **TABLE 4**, the hardness value for the SVM, ANN and RSM-Fuzzy model were compared with actual value. Subsequently, **FIGURE 4** illustrated the comparison of prediction result between SVM, ANN and RSM-Fuzzy prediction model. From Figure 5, it can be seen that the SVM model prediction obtained better agreement between coating hardness values predicted and the actual experimental result compared to RSM-Fuzzy and ANN model. Unfortunately, the ANN model prediction shows very poor agreement between coating hardness values predicted and the actual one.

TABLE 4: Comparison of Actual Experimental Testing Result with SVM, ANN and RSM-Fuzzy Model for Hardness Values.

No. of Dataset	Input			Output			
	Power kW	Voltage Volt	Temp °C	Actual	RSM-Fuzzy	ANN	SVM
1	5	100	280	5.2	6.25	5.20	4.32
2	6.5	150	350	10.3	9.92	2.64	10.61
3	7	145	450	14.2	9.66	2.64	12.74
Predictive Performance					RSM-Fuzzy	ANN	SVM
Percentage Error %					11.50	51.94	10.07
Mean Square Error (MSE)					1.09	64.09	1.00
Co-efficient Determination (R2)					0.99	-3.69	0.99
Model Accuracy %					88.49	48.06	89.93

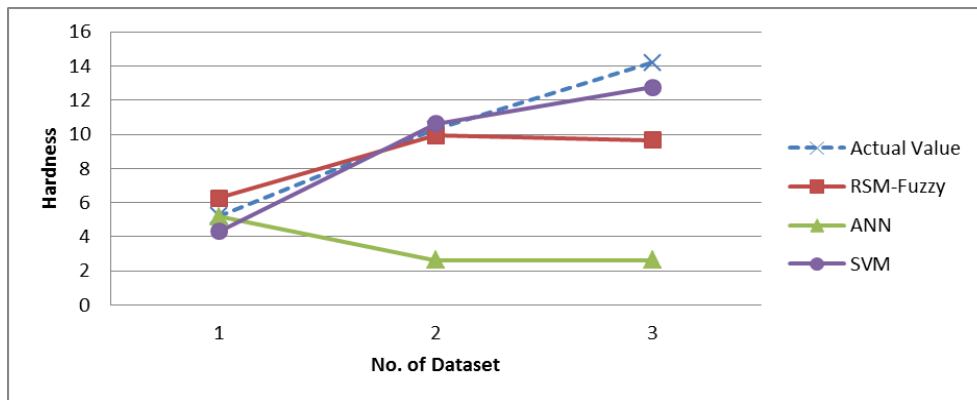


FIGURE 4: Comparison Actual Experimental Testing Result against SVM, ANN and RSM-Fuzzy Prediction Result for Hardness TiAlN Coating.

Meanwhile, **FIGURE 5** shows the comparison of predictive performances between the prediction models. The percentage error was used to observe the gap between actual and the prediction model. SVM model gave the less percentage error compared to the other model with 10.07% while RSM-Fuzzy and ANN gave 11.50% and 51.46% respectively. While MSE was used to quantify the difference between predicted and actual values. The less MSE gave the better performances of the model. SVM and RSM-Fuzzy gave very less MSE compare to ANN. In term of co-efficient determination, the value of the R^2 of SVM and RSM-Fuzzy were 0.99 which means

near to 1.0. So it's indicated that regression line fits the data very well. Unfortunately, ANN model obtained negative value of R^2 with -3.99 which mean the predictions which are being compared to the corresponding outcomes have not been derived from a model-fitting procedure using those data. For model accuracy, SVM model produce more accurate with 89.93% compared to the RSM-Fuzzy with 88.49%. Poorly, ANN model was outperformed by produce very less model accuracy with 48.08% only. Thus based on the result obtained, its can concluded that SVM model prediction shows the better predictive performances compared to the ANN and RSM-Fuzzy model prediction. Once again, the ANN model prediction was outperforming by obtained very poor predictive performance.

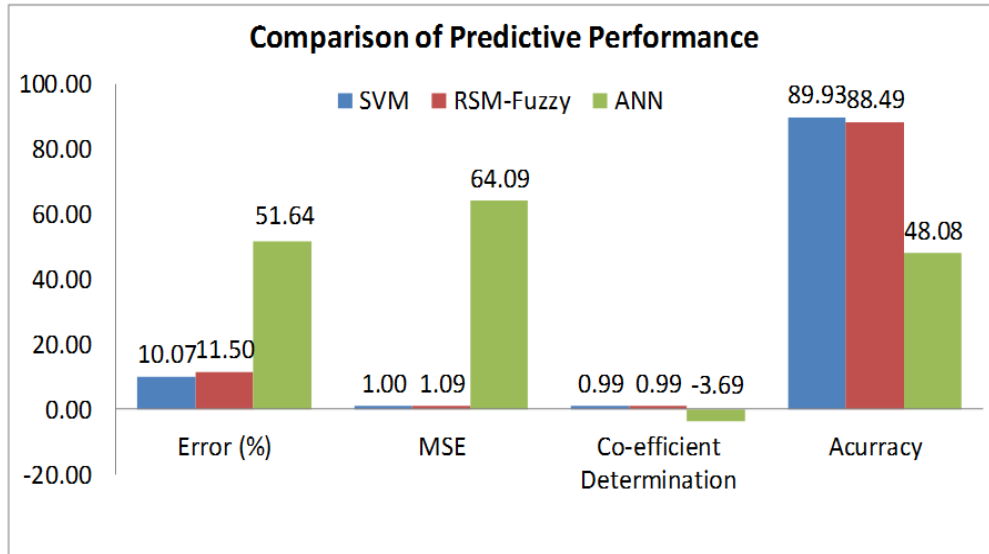


FIGURE 5: Comparison of Predictive Performance between SVM, ANN and RSM-Fuzzy Prediction Model.

7. CONCLUSION

In this paper, we have presented the computational based approach for predicting the hardness performances of TiAlN coatings. A new application in predicting the hardness performances of TiAlN coatings using a method called Support Vector Machine (SVM) and Artificial Neural Network (ANN) were implemented. The 20 experimental data were used in this study are based on previous work [7] in purpose modeling the SVM and ANN prediction. The influential factors of three coating process parameter namely substrate sputtering power, substrate bias voltage and substrate temperature were selected input while the output parameter is the hardness. These prediction models were validated using three experimental dataset in purpose validating the predictive performances of the model and the results obtained were compared against the RSM-Fuzzy model by Jaya *et al.* In terms of predictive performance evaluation, four performances matrix were applied that are percentage error, mean square error (MSE), co-efficient determination (R^2) and model accuracy. The results have shown that:

- SVM model gave the less percentage error compared to the other model.
- MSE was used to quantify the difference between predicted and actual values. The less MSE gave the better performances of the model. SVM and RSM-Fuzzy gave very less MSE compare to ANN.
- The value of the R^2 of SVM and RSM-Fuzzy were 0.99 which means near to 1.0. So it's indicated that regression line fits the data very well. Unfortunately, ANN model obtained negative value of R^2 with -3.99 which mean the predictions which are being compared to

the corresponding outcomes have not been derived from a model-fitting procedure using those data.

- In term of model accuracy, SVM model produce more accurate accuracy in prediction compared to the hybrid RSM-Fuzzy model. Unfortunately, ANN model was outperformed by produce very less model accuracy.
- Thus, based on the predictive performances, the proposed SVM model can be another alternative to predict the hardness performances of TiA1N coating other than RSM-Fuzzy found by Jaya *et al.* Even, the SVM model was better option instead of RSM-Fuzzy in cases for predicting the hardness performances of TiA1N coating.
- Unfortunately ANN model obtained very poor performances in term of predictive performances and feared cannot be an option in predicting the hardness performances of TiA1N coating.
- Thus, the result indicated that SVM model obtained better prediction performances outperform the ANN and RSM-Fuzzy model in cases of prediction of hardness performances in TiA1N coating
- As a conclusion, the SVM model is a better option for predicting the hardness performances of TiA1N coating in PVD magnetron sputtering process.

8. REFERENCES

- [1] Tuffy K., Byrne, G., and Dowling, D. (2004). Determination of the optimum TiN coating thickness on WC inserts for machining carbon steels. *Journal of Materials Processing Technology*, 155 (156), 1861-1866.
- [2] Mohamad, M.A., Haron, H., Ali, N.A., (2012). Prediction of Hardness in Titanium Aluminium Nitride TiA1N Coating Process: A Review. *Computational Intelligence, Modelling and Simulation (CIMSIM), 2012 Fourth International Conference*, 111-116.
- [3] H. C. Jiang, W. L. Zhang, W. X. Zhang, and B. Peng, (2010). Effects of argon pressure on magnetic properties and low-field magnetostriction of amorphous TbFe films, *Physica B*, 405, 834-838.
- [4] A. R. Md Nizam (2010). Modelling of Physical Vapor Deposition (PVD) Process on Cutting Tool using Response Surface Methodology (RSM). PhD: Coventry University.
- [5] P. L. Sun, C. H. Hsu, S. H. Liu, C. Y. Su, and C. K. Lin., (2010) Analysis on microstructure and characteristics of TiAlN/CrN nano-multilayer films deposited by cathodic arc deposition. *Thin Solid Films*.
- [6] T. Zhou, P. Nie, X. Cai, and P. K. Chu., (2009) Influence of N₂ partial pressure on mechanical properties of (Ti,Al)N films deposited by reactive magnetron sputtering. *Vacuum*, 83, 1057-1059.
- [7] A.S.M Jaya, Muhamad M.R., Rahman M.N.A, Napiah Z.A.F.M, Hashim S.Z.M, Haron H., (2011) Hybrid RSM- fuzzy modeling for hardness prediction of TiAlN coatings. *Intelligent Systems Design and Applications (ISDA) 11th International Conference*, 313-318.
- [8] Tosun, N., Ozler, L., (2002). A study of tool life in hot machining using artificial neural networks and regression analysis method. *J. Mater. Process. Technol.* 124, 99–104.

- [9] Singh, A.K., Panda, S.S., Pal, S.K., Chakraborty, D., (2006). Prediction drill wear using an artificial neural network. *Int. J. Adv. Manuf. Technol.* 28, 456–462.
- [10] Liu, T.C., Li, R.K., Chen, M.C., (2006). Development of an artificial neural network to predict lead frame dimensions in an etching process. *Int. J. Adv. Manuf. Technol.* 27, 1211–1216.
- [11] Gunn S.R. (1998). Support Vector Machine for Classification and Regression. Technical Report. Faculty of Engineering, Science and Mathematics School of Electronics and Computer Science. University of Southampton.
- [12] Burges C. (1998). A tutorial on support vector machines for pattern recognition. *Data Mining and Knowledge Discovery*, 121-167.
- [13] Wang et al. (2011). Prediction of Machine Tool Condition Using Support Vector Machine. *Journal of Physics: Conference Series* 305, 012113,doi:10.1088/1742-6596/305/1/012113.
- [14] Vapnik, V.(1998.) . The support vector method of function estimation. *In J. Suykens, J. Vandewalle (Eds.), Nonlinear modeling: Advanced black-ox techniques.* 55–86 Dordrecht: Kluwer,
- [15] M. J. Anderson and P. J. Whitcomb, (2000). *DOE Simplified: Practical Tools for Effective Experimentation.* Portland, OR: Productivity Press.
- [16] Radhika and Shashi, (2009). Atmospheric temperature prediction using support vector machine. *International Journal of Computer Theory and Engineering*, 1(1), 1793-8201.
- [17] Haykin, S., (1999) *Neural Network- A Comprehensive Foundation.* Prentice Hall.
- [18] D. C. Montgomery (2005), *Design and Analysis of Experiments*, 6th ed. New Jersey: John Wiley and Sons.
- [19] Hsu, C. W., & Lin, C. J., (2002). A simple decomposition method for support vector machine. *Machine Learning*, 46(1–3), 219–314.
- [20] Huang,C.,L. and Wang,C.J., (2006). A GA-based feature selection and parameters optimization for support vector machines. *Expert Systems with Applications* 31, 231–240.

INSTRUCTIONS TO CONTRIBUTORS

The main aim of International Journal of Artificial Intelligence and Expert Systems (IJAE) is to provide a platform to AI & Expert Systems (ES) scientists and professionals to share their research and report new advances in the field of AI and ES. IJAE is a refereed journal producing well-written original research articles and studies, high quality papers as well as state-of-the-art surveys related to AI and ES. By establishing an effective channel of communication between theoretical researchers and practitioners, IJAE provides necessary support to practitioners in the design and development of intelligent and expert systems, and the difficulties faced by the practitioners in using the theoretical results provide feedback to the theoreticians to revalidate their models. IJAE thus meets the demand of both theoretical and applied researchers in artificial intelligence, soft computing and expert systems.

IJAE is a broad journal covering all branches of Artificial Intelligence and Expert Systems and its application in the topics including but not limited to technology & computing, fuzzy logic, expert systems, neural networks, reasoning and evolution, automatic control, mechatronics, robotics, web intelligence applications, heuristic and AI planning strategies and tools, computational theories of learning, intelligent system architectures.

To build its International reputation, we are disseminating the publication information through Google Books, Google Scholar, Directory of Open Access Journals (DOAJ), Open J Gate, ScientificCommons, Docstoc and many more. Our International Editors are working on establishing ISI listing and a good impact factor for IJAE.

The initial efforts helped to shape the editorial policy and to sharpen the focus of the journal. Started with Volume 5, 2014, IJAE appears with more focused issues related to artificial intelligence and expert systems studies. Besides normal publications, IJAE intend to organized special issues on more focused topics. Each special issue will have a designated editor (editors) – either member of the editorial board or another recognized specialist in the respective field.

We are open to contributions, proposals for any topic as well as for editors and reviewers. We understand that it is through the effort of volunteers that CSC Journals continues to grow and flourish.

LIST OF TOPICS

The realm of International Journal of Artificial Intelligence and Expert Systems (IJAE) extends, but not limited, to the following:

- AI for Web Intelligence Applications
- AI Parallel Processing Tools
- AI Tools for Computer Vision and Speech Understand
- Application in VLSI Algorithms and Mobile Communication
- Case-based reasoning
- Derivative-free Optimization Algorithms
- Evolutionary and Swarm Algorithms
- Expert Systems Components
- Fuzzy Sets and logic
- Hybridization of Intelligent Models/algorithms
- Inference
- Intelligent Planning
- AI in Bioinformatics
- AI Tools for CAD and VLSI Analysis/Design/Testing
- AI Tools for Multimedia
- Automated Reasoning
- Data and Web Mining
- Emotional Intelligence
- Expert System Development Stages
- Expert-System Development Lifecycle
- Heuristic and AI Planning Strategies and Tools
- Image Understanding
- Integrated/Hybrid AI Approaches
- Intelligent Search

- Intelligent System Architectures
- Knowledge-Based Systems
- Logic Programming
- Multi-agent Systems
- Neural Networks for AI
- Parallel and Distributed Realization of Intelligence
- Reasoning and Evolution of Knowledge Bases
- Rule-Based Systems
- Uncertainty
- Knowledge Acquisition
- Knowledge-Based/Expert Systems
- Machine learning
- Neural Computing
- Object-Oriented Programming for AI
- Problem solving Methods
- Rough Sets
- Self-Healing and Autonomous Systems
- Visual/linguistic Perception

CALL FOR PAPERS

Volume: 5 - Issue: 3

i. Submission Deadline : April 5, 2014

ii. Author Notification: May 5, 2014

iii. Issue Publication: May 2014

CONTACT INFORMATION

Computer Science Journals Sdn Bhd

B-5-8 Plaza Mont Kiara, Mont Kiara
50480, Kuala Lumpur, MALAYSIA

Phone: 006 03 6204 5627

Fax: 006 03 6204 5628

Email: cscpress@cscjournals.org

CSC PUBLISHERS © 2014
COMPUTER SCIENCE JOURNALS SDN BHD
B-5-8 PLAZA MONT KIARA
MONT KIARA
50480, KUALA LUMPUR
MALAYSIA

PHONE: 006 03 6204 5627

FAX: 006 03 6204 5628

EMAIL: cscpress@cscjournals.org